

Our Case Docket No.: 01 USN 152

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
Utility Patent Application Charge Sheet  
National Application under 35 U.S.C. § 371

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Transmitted herewith for Entering the National Stage in the United States under Article 39(1)(a) of the Paris Convention and under 35 U.S.C. § 371 is the National Stage Entry Application of inventor(s).

Stephen John McLoughlin

For "Apparatus and Method for Transmitting Information to and Communicating with a Downhole Tool";

Enclosed are also:-

- X PCT International Specification PCT/GB00/01629 (with drawings and search report) designating the United States
- X Entry to United States National Stage and substitute pages (amendment of PCT claims)
- X PCT Request
- X PCT Demand
- X PCT/EPC Written Opinion
- X Declaration and Power of Attorney
- X Self-addressed stamped postcard receipt.
- X Certificate of Express Mailing


FILLING FEE

Claims as Filed For	Number Filed	Less	Number Extra	Small Rate	Entity FEE	O R	Other Small Rate	than Entity FEE
Basic Fee Under 37 CFR 1.492(a)(5)	20				\$455			\$890
Total Claims	20	- 20	8	\$9	\$0		\$18	\$0
Independent Claims	3	- 3	0	\$42	\$0		\$84	\$0
Multiple Dependent Claims	no							
TOTAL FEES CLAIMS					\$455			\$890

OTHER FEES - none

- X Firm's check Number 002883 in the amount \$455.00 is enclosed.

Respectfully submitted

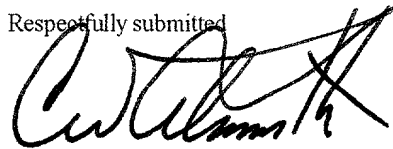

C. W. ALWORTH, Registration No. 33,824  
Alworth Law and Engineering  
Customer Number 27645  
505 Cumberland Road  
Tyler, Texas 75703-9325  
(903) 534-0477 (Telephone)  
(903) 581-1441 (Fax)  
calworth@alworth.com

ATTORNEYS FOR APPLICANT

Our Case Docket No.: 01 USN 152

Date: October 25, 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
Utility Patent Application Charge Sheet  
National Application under 35 U.S.C. § 371The Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Transmitted herewith for Entering the National Stage in the United States under Article 39(1)(a) of the Paris Convention and under 35 U.S.C. § 371 is the National Stage Entry Application of inventor(s):

Stephen John McLoughlin

For "Apparatus and Method for Transmitting Information to and Communicating with a Downhole Tool";

Enclosed are also:-

- X PCT International Specification PCT/GB00/01629 (with drawings and search report) designating the United States
- X Entry to United States National Stage and substitute pages (amendment of PCT claims)
- X PCT Request
- X PCT Demand
- X PCT/EPC Written Opinion
- X Self-addressed stamped postcard receipt.
- X Certificate of Express Mailing


## FILLING FEE

Claims as Filed	Number Filed	Less	Number Extra	Small Rate	Entity FEE	O R	Other Small Rate	than Entity FEE
For								
Basic Fee Under 37 CFR 1.492(a)(5)	20				\$455			\$890
Total Claims	20	- 20	8	\$9	\$0		\$18	\$0
Independent Claims	3	- 3	0	\$42	\$0		\$84	\$0
Multiple Dependent Claims	no							
TOTAL FEES CLAIMS					\$455			\$890

OTHER FEES - none

- X Firm's check Number 002883 in the amount \$455.00 is enclosed.

Respectfully submitted

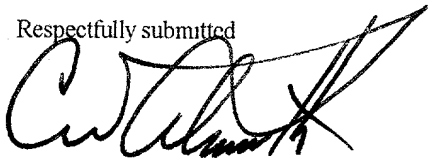C. W. ALWORTH, Registration No. 33,824  
Alworth Law and Engineering  
Customer Number 27645  
505 Cumberland Road  
Tyler, Texas 75703-9325  
(903) 534-0477 (Telephone)  
(903) 581-1441 (Fax)  
calworth@alworth.com

ATTORNEYS FOR APPLICANT

12-05-01

10/009700  
JC13 Rec'd PCT/PTO 25 OCT 2001

JC498 U.S. PTO  
10/25/01

Please type a plus sign (+) inside this box ☐

PTO/SB/05 (11-00)  
Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	01 USN 152
First Inventor	McLOUGHLIN, S.J.
Title	Apparatus & Method for Transmitting Information to & Communicating with...
Express Mail Label No.	EL 821972 595 US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☐ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
- ☒ Applicant claims small entity status.  
See 37 CFR 1.27.
- ☒ Specification (Total Pages )  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross Reference to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to sequence listing, a table, or a computer program listing appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
- ☐ Drawing(s) (35 U.S.C. 113) [ Total Sheets  ]
- Oath or Declaration [ Total Pages  ]
  - ☒ Newly executed (original or copy)
  - ☐ Copy from a prior application (37 CFR 1.63 (d))  
(for continuation/divisional with Box 18 completed)
    - ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
- ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - ☐ Computer Readable Form (CRF)
  - Specification Sequence Listing on:
    - ☐ CD-ROM or CD-R (2 copies); or
    - ☐ paper
  - ☐ Statements verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS


- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☐ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
- ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
- ☐ Request and Certification under 35 U.S.C. 122 (b)(2)(B)(i) Applicant must attach form PTO/SB/35 or its equivalent.
- ☒ Other *Statement of McLaughlin Entry with Substitute pages*

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

<input type="checkbox"/> Continuation	<input type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No. _____
Prior application information		Examiner _____	Group Art Unit _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 19. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label		or <input type="checkbox"/> Correspondence address below
Name <b>27645</b>		
Address <b>PATENT TRADEMARK OFFICE</b>		
City	State	Zip Code
Country	Telephone	Fax

Name (Print/Type)	<b>C.W. ALWORTH</b>	Registration No. (Attorney/Agent)	<b>33,824</b>
Signature		Date	<b>25 Oct 2001</b>

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Docket Number 01 USN 152  
Client - Marks & Clerk

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**PATENT APPLICATION**

**UNDER 35 U.S.C. § 371**

Applicant: McLoughlin, Stephen John Date: October 25, 2001  
Serial Number: To Be Assigned Examiner:  
Filing Date: October 25, 2001 Art Unit:  
Title: Apparatus and Method for Transmitting Information to and  
Communicating with a Downhole Tool

**CERTIFICATE OF EXPRESS MAILING**

Pursuant to Rule 1.10, I, the undersigned Attorney for the Applicant, do hereby certify and declare, subject to penalty of perjury, that the foregoing National Entry under 35 U.S.C. Section 371 in the above-noted patent application was properly mailed, with proper postage prepaid, to the U.S. Patent and Trademark Office on the 25<sup>th</sup> day of October, 2001, by Express Mail, Receipt Number EL 821972595 US. Pursuant to the same rule, the Commissioner is hereby respectfully requested to assign the filing date as the date of Express Mailing, namely October 25, 2001.



C. W. ALWORTH  
Registration No. 33,824  
Alworth Law and Engineering  
505 Cumberland Road  
Tyler, Texas 75703-9325  
(903) 534-0477 (Telephone)  
(903) 581-1441 (Fax)  
calworth@alworth.com

ATTORNEYS FOR APPLICANT

**EL 821972595US**

Docket No: 01 USN 152  
Client: Marks & Clerk

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**PATENT APPLICATION**

**UNDER 35 U.S.C. § 371**

Applicant:	McLoughlin, Stephen John	Date: October 25, 2001
Serial Number:	To Be Assigned	Examiner:
Filing Date:	October 26, 2001	Art Unit:
Title:	Apparatus and Method for Transmitting Information to and Communicating with a Downhole Tool	

**Statement of National Filing and Substitution of certain PCT Pages**

Assistant Commissioner for Patents  
The United States Patent and Trademark Office  
Washington DC 20231

Dear Sir:

Enclosed, under the Rules of the Office, under 35 U.S.C. § 371, and under the Patent Cooperation Treaty, are the necessary documents for entry into the United States National Stage of a PCT Application.

These documents are:

- 1) A complete copy of the International Application PCT/GB96/00813 including
  - a) PCT Request,
  - b) PCT Demand,
  - c) PCT International Publication with Search Report,
  - d) PCT/EPC written opinion,
  - e) **New amended pages 16 to 18 (replacing pages 16 to 19 in the original PCT application),**
- 2) Firm's check in the amount of \$445.00 (small entity),
- 3) Declaration and Power of Attorney.

Inventor McLoughlin is a citizen of the United Kingdom. His address is The

Homestead, North Duffield, Near Selby, Yorkshire, United Kingdom.

The base PCT Application PCT/GB00/01629 designated the United States, was filed on 27 April 2000, and was published on 2 November 2000 as WO/0065198. The application claims priority from the following applications:

United States of America	27 April 1999	60/131208
United Kingdom	9 November 1999	9926545.6

The original PCT application claim structure uses a series of multiple dependent claims, most of which are improper under the Rules of the United States Patent and Trademark Office. Additionally an improper omnibus claim also appears in the PCT claim structure.

Please accept new amended pages 16 to 18, which correct the improper claims in the PCT application to meet the requirements of the Rules of the United States Patent and Trademark Office. These pages REPLACE pages 16 to 19 in the original PCT application. The amended pages containing amended claims **DO NOT** add new matter.

The applicant qualifies as a Small Entity and therefore may pay reduced fees.

It is therefore believed that the correct filing fees have been submitted herewith and that the PCT Application is in proper condition for receiving a filing date under Entry into the National Stage under 35 U.S.C. Section 371 and 37 C.F.R. 1.495.

Respectfully Submitted



C. W. ALWORTH

Registration No. 33,824  
Alworth Law and Engineering  
505 Cumberland Road  
Tyler, Texas 75703-9325  
(903) 534-0477 (Telephone)  
(903) 581-1441 (Fax)  
calworth@alworth.com

ATTORNEYS FOR APPLICANT

10/009700

JC13 Rec'd PCT/PTO 25 OCT 2001

Substitute Page 16

**CLAIMS:**

1. An apparatus for the use of drilling or producing from a well bore, the apparatus comprising a downhole member capable of being attached to a tubular, means for rotating the tubular, control means for controlling the rotation of said tubular in order to transmit information along said tubular and means for monitoring the rotation of said tubular and for decoding said information transmitted along said tubular such that a magnitude of a parameter can be determined from the rotation of said tubular.
2. The apparatus of claim 1, wherein the control means is configured to control the rotational velocity or frequency of the tubular.
3. The apparatus of claim 1, wherein the control means is configured to stop the rotation of the tubular for a predetermined time.
4. The apparatus of claim 3, wherein the monitoring means is configured to measure the time of non-rotation of the tubular.
5. The apparatus of claim 3, wherein the monitoring means is configured to measure the time over which the tubular is continuously rotating.
6. The apparatus of claim 5, wherein the monitoring means is configured to measure the time over which the tubular is continuously rotating at a particular rotational speed.
7. The apparatus of claim 1, wherein the monitoring means is configured to count the number of rotations of the tubular.
8. The apparatus of claim 1, wherein the monitoring means comprises a magnet.
9. The apparatus of claim 1, wherein the monitoring means comprises at least one of a radioactive or sonic source.

## Substitute Page 17

10. The apparatus of claim 1, wherein the monitoring means comprises a gravitational accelerometer configured to detected alternating variations in the gravitational field due to rotation of the tubular.

11. The apparatus of claim 1, wherein said drilling member comprises:

a hollow rotatable mandrel having a concentric longitudinal bore;

an inner sleeve rotatably coupled about said mandrel, said inner sleeve having an eccentric longitudinal bore of sufficient diameter to allow free relative motion between said mandrel and said inner sleeve;

an outer housing having an outer surface, said outer housing is rotatably coupled around said inner eccentric sleeve, said outer housing having an eccentric longitudinal bore forming a weighted side adapted to automatically seek the low side of the wellbore and having sufficient diameter to allow free relative motion between said inner sleeve and

a plurality of stabilizer shoes longitudinally attached to or formed integrally with said outer surface of said outer housing;

drive means for selectively rotating said inner eccentric sleeve with respect to said outer housing and

logic means for controlling said drive means based on the information transmitted along said drill string.

12. An apparatus for transmitting information in a timely manner from the face of the Earth to a downhole assembly, whereby the rotation of the drill string is used as an output device, conveying information to components which are located in the wellbore, the apparatus comprising:

a device which is closely coupled to either the drill string, or a non-rotating sub assembly, which emits a signal or influences its environment such that the rotation of the drillstring is used to activate a sensor means which may be integrated into either the drill string, or a non-rotating sub-assembly with a timing device such that the sensor outputs derived from the rotation of the drillstring system may be measured against a time-based system such that meaningful encoding may be accomplished, which may be coupled to an actuation or switching mechanism or mechanisms.

## Substitute Page 18

13. The apparatus of claim 12, wherein the emitter or device influencing the environment comprises a magnet or a magnetic device.
14. The apparatus of claim 12, wherein the emitter or device influencing the environment comprises a mechanical switch which is activated by the rotation of the drill string.
15. The apparatus of claim 12, wherein the emitter or device influencing the environment comprises at least one of a sonic or radioactive source.
16. A method of transmitting information along a tubular to a downhole member located within a well bore, the method comprising the steps of:
  - rotatably driving said tubular, wherein the rotation of said tubular is controlled accordance with information which is to be transmitted along said tubular;
  - monitoring the rotation of said tubular; and
  - analysing the monitored rotation of said tubular such that a magnitude of a parameter can be determined from the rotation of said tubular.
17. The method of claim 16, wherein the step of monitoring the rotation of said tubular comprises the step of monitoring the rotational velocity of the tubular.
18. The method of claim 16, wherein the step of monitoring the rotation of the tubular comprises the step of timing a period of non-rotation of the tubular.
19. The method of claim 16, wherein the step of driving the tubular comprises the step stopping the rotation of the tubular for a pre-determined time determined by the information which is to be transmitted along the tubular.
20. The method of claim 16, wherein the step of monitoring the rotation of the tubular comprises the step of measuring the time over which the tubular is continuously rotating at a particular frequency.

WO 00/65198

4/pts

1

10/009700

PCT/GB00/01629

JC13 Rec'd PCT/PTO 25 OCT 2001

Apparatus and Method for Transmitting Information to and Communicating with a  
Downhole Device

The present invention is concerned with the field of downhole tools. More specifically, the present invention is concerned with an apparatus and method for transmitting information to a downhole tool.

A drilling tool or member is a device suitable for drilling a well bore or the like. As the drilling tool drills further into the ground, communicating with the tool becomes more and more difficult. Other downhole tools, variously referred to as "production tools", fulfilling different functions from drilling tools yet having similar data requirements to drilling tools are considered equally within the scope of this apparatus and method.

The recognised term in the art for the method of transmitting information from the drilling tool to the surface is 'telemetry'. Telemetry can be achieved by many means, for example, 'hardwire', where the signal is passed along a conducting medium via electrical means and to which the drilling tool is attached.

The above telemetry method requires the provision of a separate communication route for the electrical signal from the surface. This provides drawbacks in terms of both cost and potential reliability as the signal must reach the tool when the tool is many miles below the surface.

A telemetry medium for communicating with the tool should ideally be one of the parameters which is readily available in either drilling or production scenarios. A drilling parameter is a parameter which must be supplied to the drilling tool in the vast majority of drilling scenarios.

WO 00/65198

PCT/GB00/01629

2

Drilling parameters such as the 'weight-on-bit', pump cycling and drill string rotation have been previously been considered. However, generally, these have been used just to toggle a switch between two states, and represent, at worst a binary switching device and, at best, a means of stepping through multiple options.

The drill string rotation is a drilling parameter which is common to almost all rotary drilling operations. This is typically measured in revolutions per minute (RPM). Variations in the rotation of the drill string can be used, be that in terms of the actual rotational velocity, the time when the drilling string is continuously rotating at a continuous speed or a measured time when the drill string is not rotating can be used to transmit a sophisticated command sequence, wherein the rotary command parameter has magnitude. This is as opposed to the conventional toggle signal transmitted down the drill string to the drilling tool. Thus, this new apparatus and method addresses all the problems posed by known prior art.

Although the term "drill string" has been used, it will be appreciated that the "drill string" could be any tubular which is connected to a downhole tool. For example, rotation of a production string could also be used if the downhole tool is a production tool. A tubular can be any pipe or any medium which generally connects the downhole tool (when in position in the well bore) with a surface control station, providing that rotation of the tubular at the surface causes rotation of at least a part of the tubular at the downhole tool.

Therefore, in a first aspect, the present invention provides an apparatus for use in drilling or producing from a well bore, the apparatus comprising a downhole member capable of being attached to a tubular, means for rotating a tubular, control means for controlling the rotation of said tubular in order to transmit information along said tubular and means for monitoring the rotation of said tubular and for decoding said information transmitted along said tubular such that a magnitude of a parameter can be determined from the rotation of said tubular.

WO 00/65198

PCT/GB00/01629

3

As previously described, the tubular may be a drill string, production string or the like. The downhole member may be a drilling tool, production tool or the like.

In a second aspect, the present invention provides a method for transmitting information along a tubular to a downhole member located within a well bore, the method comprising the steps of:

rotatably driving said tubular, wherein the rotation of said tubular is controlled in accordance with information which is to be transmitted along said tubular;

monitoring the rotation of said tubular; and

analysing the monitored rotation of said tubular such that a magnitude of a parameter can be determined from the rotation of said tubular.

The variation in the tubular rotation may be provided by varying the rotational velocity or frequency of the tubular, measuring the time for continuous rotation of the tubular, measuring the time between successive rotations of the tubular (i.e. the time when the tubular is not rotating), or any of the above parameters in either separately or in combination etc.

This ability to vary the rotational speed or frequency of the tubular allows a magnitude to be communicated to the downhole member as opposed to just a binary signal.

Therefore a signal, such as a magnitude of the change in a drilling angle can be communicated to the tool by using just the tubular rotation. Explicitly, the measured frequency of the tubular at the downhole member can communicate a numerical value to the drill string.

The rotation or frequency of the tubular may be monitored by the use of an emitter device which emits a signal or influences its environment such that the rotation of the drill string is used to activate a sensor means.

The emitter device which emits a signal or influences its environment may comprise a magnet. Alternatively, or in addition to the magnet, the device may also comprise a device which emits a sonic or a radioactive signal.

The emitter device may be located on the tubular or rotating part of the apparatus connected to the tubular or on a non-rotating part of the apparatus.

The emitter device may comprise a mechanical switch which is activated by the rotation of the tubular, such that each revolution is equal to an analogue or digital data point.

The rotation of the tubular may be monitored using a sensor. The sensor may sense a field or a change in a field or signal emitted by the emitter. For example, if the emitter is a magnet then the sensor may be a Hall effect device or a magnetometer.

Alternatively, the sensor may be used to sense changes in an inherently present parameter due to the rotation of the tubular. For example, the sensor may comprise an accelerometer which receives direct alternating gravitational data inputs as a direct result of the rotation of the tubular. Such a sensor would preferably sense the centre of the Earth for use in controlling a Measurement-While-Drilling, Logging-While-Drilling or similar device. The sensor regardless of its type, may be activated by the rotating tubular such that each revolution of the drill string is equal to an analogue or binary data point. The sensor may be located on the tubular, a rotating part of the apparatus connected to the tubular or a non rotating part of the apparatus or a non-rotating part of the apparatus depending on the location of the emitter.

Preferably, the sensor means comprises a timing device such that sensor outputs derived from the rotation of the tubular may be measured over time.

A plurality of emitters and/or sensors may be provided. If a plurality of emitter devices and/or sensor means are provided then each of the devices and/or sensor means may be actuated in an independent or sequential manner. The plurality of emitters may be

located radially or axially on the rotating drill string. If the emitters are a plurality of magnets then the magnets may be aligned with alternating polarities.

The output from the sensor means may be analogue or digital. The output from the sensor means will generally be provided to a drive means or a logic means in order to control the drilling member or other device in accordance with the information transmitted down the drill string.

The sensor is preferably isolated from wellbore fluids and may be contained in a pressure housing. More preferably, the pressure housing is magnetically transparent. The output from the sensor may be utilized for triggering an activation means in the instrumentation of the downhole member or an assembly which is housed in a separate physical housing. The activation means may be logical, electronic, mechanical or physical in form. The activation means may be capable of activating multiple devices in either an independent or sequential manner. The actuation means may be bi-phase, incremental or continuous in nature.

The above apparatus or method preferably uses phase shift modulation or other means of checking for errors or variances in the tubular rotation.

The apparatus and method according to the first and second aspects of the invention (respectively) may be used with any downhole device where it is necessary to transmit a control parameter to the device, for example, to control the drilling direction.

However, they are especially suited for use with a wellbore directional steering tool as described in WO-A-96/31679. The latter device is an apparatus for selectively controlling from the surface, the drilling direction of wellbore. It comprises a hollow rotatable mandrel, an inner sleeve, an outer housing, a plurality of stabilizer shoes and a drive means. The hollow rotatable mandrel has a concentric longitudinal bore. The inner sleeve is rotatably coupled about the mandrel and has an eccentric longitudinal bore of sufficient diameter to allow free relative motion between the mandrel and the

inner sleeve. The outer housing is rotatably coupled around the inner eccentric sleeve and has an eccentric longitudinal bore forming a weighted side. The outer housing also has sufficient diameter to allow free relative motion between the inner sleeve. Two stabilizer shoes are longitudinally attached to or formed integrally with the outer surface of the outer housing. Finally, the drive means is arranged for selectively rotating the inner eccentric sleeve with respect to the outer housing.

An embodiment of the directional tool is shown in Figures 3A and 3B. It is shown in a configuration whereby it is attached to an adapter sub. 104, which can be attached to the drill string (not shown). The adapter sub is attached to the inner rotatable mandrel 111 and may not be necessary if the drill string pipe threads match the device threads. The mandrel is free to rotate within the inner eccentric sleeve 112. The mandrel 111 is capable of sustained rotation within the inner sleeve 112. The inner eccentric sleeve 112 may be turned freely within an arc, by a drive means (not shown), inside the outer eccentric housing or mandrel 113. The bearing surfaces between the inner and outer mandrels are not critical as they are not in constant mutual rotation, but they must be capable of remaining clean and in relatively low torque with respect to each other in the drilling environment.

The inner rotating mandrel 111, is attached directly to a drill bit 107. However, the threads may differ between the two elements and an adapter sub may be required for matching purposes.

Figure B shows the relative eccentricity of the inner, 112 and outer, 113 eccentric sleeves (outer housing). The outer housing consists of a bore passing longitudinally through the outer sleeve which accepts the inner sleeve. The outer housing is eccentric on its outside, shown as the "pregnant portion", 120.

The pregnant portion or weighted side, 120 of the outer housing forms the heavy side of the outer housing and is manufactured as a part of the outer sleeve. The pregnant housing contains the drive means for controllably turning the inner eccentric sleeve

WO 00/65198

PCT/GB00/01629

7

within the outer housing. Additionally, the pregnant housing may contain logic circuits, power supplies, hydraulic devices, and the like which are (or may be ) associated with the 'on demand' turning of the inner sleeve.

There are two stabilizer shoes, 121, on either side of the outer housing located at right angles to the pregnant housing and on the centre line drawn through the center of rotation on the inner sleeve. These two shoes serve to counter any reactionary rotation on the part of the outer housing caused by bearing friction between the rotating mandrel 111 and the inner eccentric sleeve 112. The stabilizer shoes are normally removable and are sized to meet the wellbore diameter. The same techniques used to size a standard stabilizer can be applied in choosing the size of the stabilizer shoes. Alternatively, the shoes 121 can be formed integrally with the outer housing 113. The pregnant or weighted portion of the outer housing 113, will tend to seek the low-side of the hole and the operation of the apparatus depends on the pregnant housing being at the low-side of the hole.

The manner of functioning of the apparatus and method of the present invention to control a drilling device such as a directional drilling device as shown in Figures A and B will be described in more detail hereinbelow.

The present invention will now be described with reference to the following non-limiting preferred embodiments in which:

Figure 1 shows a schematic of an embodiment of the present invention;

Figure 2A shows a single cycle of a typical accelerometer output;

Figure 2B shows a plot of an accelerometer output used to measure a rotating drill string with a variable rotation speed;

Figure 3A shows a plot of rotation speed against time;

Figure 3B shows a plot of rotation speed against time, where the drillstring is switched between rotating at a fixed speed and zero rotation;

Figure 4A shows a cross section of a drilling tool in accordance with an embodiment of the present invention;

Figure 4B shows a cross section of a drilling tool in accordance with another embodiment of the present invention.

Figures 5A and B show a prior art drilling tool.

Figure 1 shows a schematic of an embodiment of the present invention, the drilling tool 21 is connected to the surface station 23 via drill string 25. To effect rotational drilling, the drill string 25 is rotated.

Surface station 23 is provided with rotation control means 27 which controls the rotation of the drill string. The drilling tool 21 has monitoring means 29 which monitors the rotation of the drill string 25.

Figure 2A shows the output of an accelerometer as the drill string rotates. In a single rotation of the drill string, the accelerometer output changes from a zero point to  $V_{\max}$ , returning to zero, and passing through zero to point  $V_{\min}$  and then back to zero. The output of the accelerometer is generally sinusoidal with the magnitude of the maxima and the minima being  $V_{\max}$  and  $V_{\min}$  respectively. The amplitude and form of the wave is dependent on the attributes of the particular sensor being used and also the time it takes to complete a single  $360^\circ$  revolution.

In Figure 2A, the accelerometer is attached to the drill string. The starting point for the single rotation is taken from where a test mass in the accelerometer is in a neutral position.

Figure 2B shows an accelerometer output similar to figure 2A. Except, here, a number of rotation cycles of the drill string are shown and also, the rotational speed of the drill string is varied over time. The rotational speed of the drill string is generally measured in rotations per minute or RPM.

The output of the accelerometer in figure 2B shows three full rotation cycles of the drill string. The dotted vertical lines on the figure indicate the start and end of each cycle. Here, each cycle starts when the accelerometer output is at maximum  $V_{max}$ . However, it will be appreciated that any point of the cycle could be chosen as the start point.

The first rotation cycle has a period of  $t_1$ . Once this cycle is completed, the speed of rotation of the drill string is reduced over the second cycle until a third cycle with a period of rotation  $t_2$  is achieved. Period  $t_2$  is longer than period  $t_1$ , therefore, the speed of rotation in the first cycle is greater than that of the third cycle. Thus, a change in the rotation speed of the drill string can be detected at the drilling member or drilling tool. Hence, the rotation frequency of the drill string can be used to instruct the drilling member, downhole device or tool.

Figure 3A shows a plot of the rotational velocity of the drill string over time as the rotation velocity of the drill string is changed. Rotation of the drill string is started and the rotational velocity (or equivalently the frequency of rotation) is increased to  $R_1$ . The frequency is held at  $R_1$  over time period [1]. When instructing a tool, this initial rotation frequency  $R_1$  may be used to transfer data or information along the drill string, it may also be used to send a signal to prepare the drilling member for data transfer. This signal may transmit information to alert the drilling member that if subsequent rotation speeds follow a predetermined pattern then the intention is to transfer data to the drilling member. Also, this data set can be used to set a particular parameter which is going to be transmitted along the drill string. It should be noted that the length of period [1] as well as the frequency of rotation is itself a variable parameter which can be used to send information. Using combinatorial data transmission wherein timing and frequency variables have pre-set limits reduces the possibility of operator errors and accidental actuations may be avoided.

After time period [1], the rotation of the drill string is either reduced to zero or is reduced below a threshold value for time period [2]. The threshold value is  $R_0$ . Time period [2] is primarily used to create a clear distinction between instructions.

The frequency of rotation of the drill string is then increased to  $R_2$  for time period [3]. This variation in the rotation frequency represents an easily identifiable codification as it varies both in rotational frequency and duration from time period [1]. The duration of time period [3] is restricted once again by reducing the rotational frequency to below threshold value  $R_0$  for a second time period [2].

After the second time period [2] the rotation frequency is increased to  $R_3$  for time period [4]. Rotational frequency  $R_3$  is lower than that of  $R_1$  and  $R_2$ . Time period [4] can be used as a separate data set or it can be used as supplemental data set to that transmitted in time period [3]. It may also be used as a preamble to a following data set (in a similar manner to the data set of period [1]) or it may be used as a terminating data set which may return the parameters of the tool to an equilibrium position.

Figure 3A shows that the present invention may be used to transmit codification which is linear, progressive and discrete: each data set may be sequential and may be separated from the last data set by a period of zero or low frequency data. Each data set is dependent on the speed or frequency of rotation of the drill string during a pre-determined time period for its numeric value.

There are thus two data variables in each data set i.e. frequency and duration, which may be controlled from the surface. To summarise, these two variables may be used in a number of different ways in order to talk to the tool. The tool may have a number of different parameters which require instructions from the surface. The parameter which is to be changed may be set by the measured velocity or frequency of rotation and the amount which the parameter is to be changed by may be set by the duration of the signal. Alternatively, the parameter may be chosen by a preparatory data sequence (e.g. period [1]) and the magnitude of the parameter may be communicated by the magnitude of the following velocity or frequency signal.

Averaging, standard code correction techniques, or other statistical means may be employed to improve the quality of the data obtained from each individual data set. Any number of data sets may be sequentially added in order to increase the quantity of data transmitted to the downhole instrumentation or mechanism(s).

Figure 3B shows a plot of rotation against speed similar to Figure 3A. In Figure 2B, the string is switched between a constant rotating speed  $V_{rot}$  and not rotating. In other words, there is only one variable which is duration as the rotational velocity which is related to the frequency is maintained constant. Figure 3B shows a simplification of the transmission method described with relation to figure 3A.

As in Figure 3A, four time periods are shown in Figure 3B, in period 1, the drill string rotates at  $V_{rot}$ , the logic means of the drilling member are configured to read rotation at  $V_{rot}$  as being an equilibrium stage where all logic parameters within the drill string are kept at their equilibrium values.

In period 2, the rotation of the drill string is stopped, the logic means of the drilling member vary a set parameter. For example, if the drilling direction of the drilling member is governed by the angular movement of a component of the drilling member (for example, 112 in Figure 5B), then the logic means may command the angular movement of the component for the whole of period 2.

When the drill string rotation is restarted, at the start of period 3, the movement of the component is stopped.

The movement of the component starts again at the start of period 4. (i.e. when the drill string rotation stops). Period 4 is twice as long as period 2. Therefore the component moves through twice the angle in period 4 as period 2.

Hence the duration of the period of non-rotation is converted into the angle of rotation for component 112.

Figure 4A shows a cross section of a down hole tool which may be used in accordance with an embodiment of the present invention. The actual tool shown in figure 4A is a modified version of the inventor's own prior art which is described in relation to figures 5A and 5B.

The tool comprises a outer housing 1 with an eccentric bore. An inner sleeve 2 is located within said bore such that the outer housing 1 is rotatably coupled about said inner sleeve 2. The inner sleeve 2 also has an eccentric bore which is configured to accommodate a rotating drill string member 3 such that said inner sleeve 2 can rotate relative to both said outer housing 1 and aid drill string member 3.

A magnet 4 is attached to said rotating member 3. The magnet is located in a pocket on said rotating member 3, the magnet may also be attached by some other means, for example, by adhesives. This specific embodiment uses the magnet as an emitter. However, it will be appreciated by those skilled in the art that the magnet could be replaced by any type of emitting sensor.

The outer housing 1 contains instrument barrels 6. The instrument barrels 6 are provided with sensing means. During drilling of the well bore 7, the heavy portion of the outer housing seeks the low side of the well bore and the position of the outer housing remains relatively fixed with respect to the well bore. The drill string 3 and magnet 4 rotate relative to the outer housing. Lines of flux 5 radiate from the magnet 4 in such a manner as to overcome the Earth's ambient field. The field should also be set high enough to compensate for the reduction in field strength over distance. The flux lines 5 extend radially beyond the instrument barrel 6 such that sensors within the instrument barrel 6 can detect the intensity of the emitted magnetic field. It should also be noted that the magnetic field strength should also be calculated giving due consideration to the differences in magnetic field strength of the Earth at extreme Northerly and Southerly latitudes.

WO 00/65198

PCT/GB00/01629

13

When the magnet 4 is rotated such that it is closest to the sensors in the instrument barrel 6, then a maximum in the magnetic field is detected. When the magnet 4 is furthest from the instrument barrel 6, then a minimum in the magnetic field is detected. The field detected by the sensors may be sinusoidal if it is possible to sense the radiated magnetic field at all times when the member 3 is rotating. However, as it is only necessary to measure the frequency of rotation of the member, it is adequate if the sensor is just configured to detect a maxima in the field when the magnet is at its closest to the sensor. In other words, the sensor just needs to detect a series of pulses where each pulse is equivalent to one each rotation of the member 3.

Thresholds may also be set which negate the effect of the Earth's magnetic field and which serve as limit switches. These limit switches may be employed as a means of logic control within the sensor array or within a logic control sub assembly.

A second instrument barrel 6a is also shown. This may also contain magnetic sensors. The provisions of two magnetic sensors allows the direction of the rotation of the drill string to be accurately determined as well as its magnitude.

The sensor which is isolated within the instrument barrel is preferably situated in a stainless steel, or another magnetically transparent pressure vessel such that the instrumentation is isolated from the borehole pressure. The instrumentation barrel may comprise a magnetometer, or Hall effect device or the like for detecting the magnetic field.

Inevitably, there will be material between the magnetic sensor in the instrument barrel 6 and the magnet 4 located on the rotating member. This intervening material should, as far as possible, be magnetically transparent. In other words, the magnetic field should pass through this material without becoming deflected or distorted. Materials which exhibit these properties include austenitic stainless steels and other non-ferrous material.

Figure 4B shows a variation on the device of figure 4A. In figure 4B the rotating drill string is provided with four magnets 4 arranged at 90° to one another. In the figure the magnets 4 are embedded within the outer rotating wall of the member 3. However, it should be noted that the magnets could be embedded in the inner rotating wall of the member 3.

More sophisticated coding is achievable with more than one emitter. Further, the inversion of one of the sensors can be used to provide error checking or other programming advantages to the present invention. Multiple magnets may also be used to increase the frequency of the signal from the rotating member 3 or for actuation of multiple sensors within a single data set time frame, for example, as a means of compressing data.

Multiple magnets may have the same polarity or they may have alternating alignment of polarity. In figure 4B, the magnets 4 are arranged across the same section of the tubular. However, it will be appreciated that the magnets could be arranged at various axial spacings along the member 3.

Although not shown in either of figures 4A or 4B, the downhole device will have analysis means to analyse the information sent along the drill string. If the information which is sent along the drill string requires mechanical movement of a component of the drilling tool or member, then drive means are required to move the required component are instructed. For example, the drive means may move a component either radially or axially in the drilling tool. In addition to mechanical information, the drilling tool may also require instructions which are essentially electronic in nature. For example, information relating to the preferred rate of data transmission may be sent along the drill string.

In both the generalised and preferred embodiments of the assembly, it should be understood the different signalling means may be employed, that different

WO 00/65198

PCT/GB00/01629

15

configurations may be used and that other modifications may be made without departing from the spirit and scope of the present invention as defined by the appended claims.

WO 00/65198

**PCT/GB00/01629**

16

**CLAIMS:**

1. An apparatus for the use of drilling or producing from a well bore, the apparatus comprising a downhole member capable of being attached to a tubular, means for rotating the tubular, control means for controlling the rotation of said tubular in order to transmit information along said tubular and means for monitoring the rotation of said tubular and for decoding said information transmitted along said tubular such that a magnitude of a parameter can be determined from the rotation of said tubular.
2. An apparatus according to claim 1, wherein the control means is configured to control the rotational velocity or frequency of the tubular.
3. An apparatus according to either of claims 1 or 2, wherein the control means is configured to stop the rotation of the tubular for a predetermined time.
4. An apparatus according to claim 3, wherein the monitoring means is configured to measure the time of non-rotation of the tubular.
5. An apparatus according to either of claims 3 or 4, wherein the monitoring means is configured to measure the time over which the tubular is continuously rotating.
6. An apparatus according to claim 5, wherein the monitoring means is configured to measure the time over which the tubular is continuously rotating at a particular rotational speed.
7. An apparatus according to any preceding claim, wherein the monitoring means is configured to count the number of rotations of the tubular.
8. An apparatus according to any preceding claim, wherein the monitoring means comprises a magnet.

[illegible]

TO BE SUBSTITUTED

WO 00/65198

PCT/GB00/01629

17

9. An apparatus according to any preceding claim, wherein the monitoring means comprises at least one of a radioactive or sonic source.

10. An apparatus according to any preceding claim, wherein the monitoring means comprises a gravitational accelerometer configured to detect alternating variations in the gravitational field due to rotation of the tubular.

11. An apparatus according to any preceding claim, wherein said drilling member comprises:

a hollow rotatable mandrel having a concentric longitudinal bore;

an inner sleeve rotatably coupled about said mandrel, said inner sleeve having an eccentric longitudinal bore of sufficient diameter to allow free relative motion between said mandrel and said inner sleeve;

an outer housing having an outer surface, said outer housing is rotatably coupled around said inner eccentric sleeve, said outer housing having an eccentric longitudinal bore forming a weighted side adapted to automatically seek the low side of the wellbore and having sufficient diameter to allow free relative motion between said inner sleeve and

a plurality of stabilizer shoes longitudinally attached to or formed integrally with said outer surface of said outer housing;

drive means for selectively rotating said inner eccentric sleeve with respect to said outer housing and

logic means for controlling said drive means based on the information transmitted along said drill string.

12. An apparatus for transmitting information in a timely manner from the face of the Earth to a downhole assembly, whereby the rotation of the drill string is used as an output device, conveying information to components which are located in the wellbore, the apparatus comprising:

a device which is closely coupled to either the drill string, or a non-rotating sub assembly, which emits a signal or influences its environment such that the rotation of

PCT/GB00/01629

TO BE SUBSTITUTED

WO 00/65198

PCT/GB00/01629

18

the drillstring is used to activate a sensor means which may be integrated into either the drill string, or a non-rotating sub-assembly with a timing device such that the sensor outputs derived from the rotation of the drillstring system may be measured against a time-based system such that meaningful encoding may be accomplished, which may be coupled to an actuation or switching mechanism or mechanisms.

13. An apparatus according to claim 12, wherein the emitter or device influencing the environment comprises a magnet or a magnetic device.

14. An apparatus according to claim 12, wherein the emitter or device influencing the environment comprises a mechanical switch which is activated by the rotation of the drill string.

15. An apparatus according to claim 12, wherein the emitter or device influencing the environment comprises at least one of a sonic or radioactive source.

16. A method of transmitting information along a tubular to a downhole member located within a well bore, the method comprising the steps of:  
rotatably driving said tubular, wherein the rotation of said tubular is controlled accordance with information which is to be transmitted along said tubular;  
monitoring the rotation of said tubular; and  
analysing the monitored rotation of said tubular such that a magnitude of a parameter can be determined from the rotation of said tubular.

17. A method according to claim 16, wherein the step of monitoring the rotation of said tubular comprises the step of monitoring the rotational velocity of the tubular.

18. A method according to either of claims 16 or 17, wherein the step of monitoring the rotation of the tubular comprises the step of timing a period of non-rotation of the tubular.

TO BE SUBSTITUTED

WO 00/65198

PCT/GB00/01629

19

19. A method according to claim 16, wherein the step of driving the tubular comprises the step stopping the rotation of the tubular for a pre-determined time determined by the information which is to be transmitted along the tubular.

20. A method according to claim 16, wherein the step of monitoring the rotation of the tubular comprises the step of measuring the time over which the tubular is continuously rotating at a particular frequency.

21. An apparatus as substantially hereinbefore described with reference to any of figures 1 to 4B.

22. A method as substantially hereinbefore described with reference to any of figures 1 to 4B.

TO BE SUBSTITUTED

TO BE SUBSTITUTED

10/009700

WO 00/65198

PCT/GB00/01629

1/4

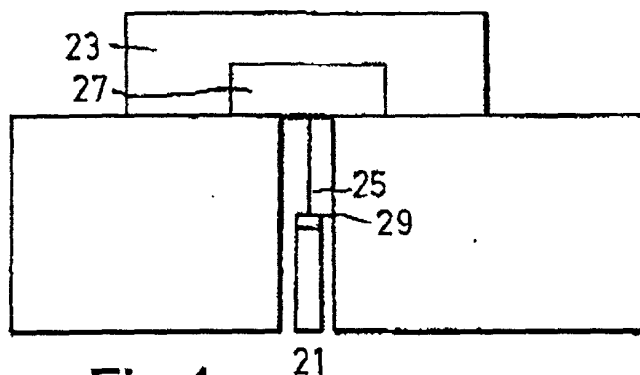


Fig. 1

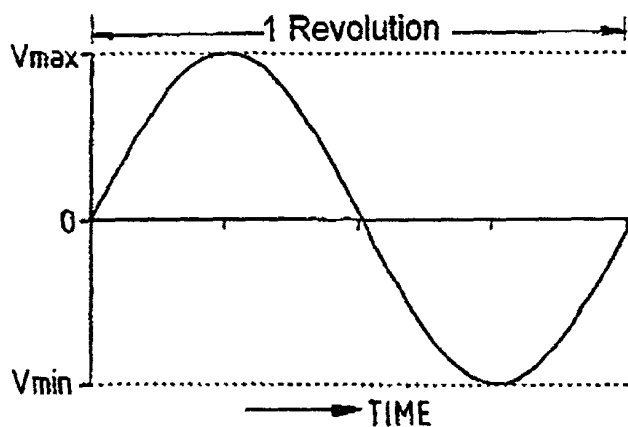


Fig. 2A

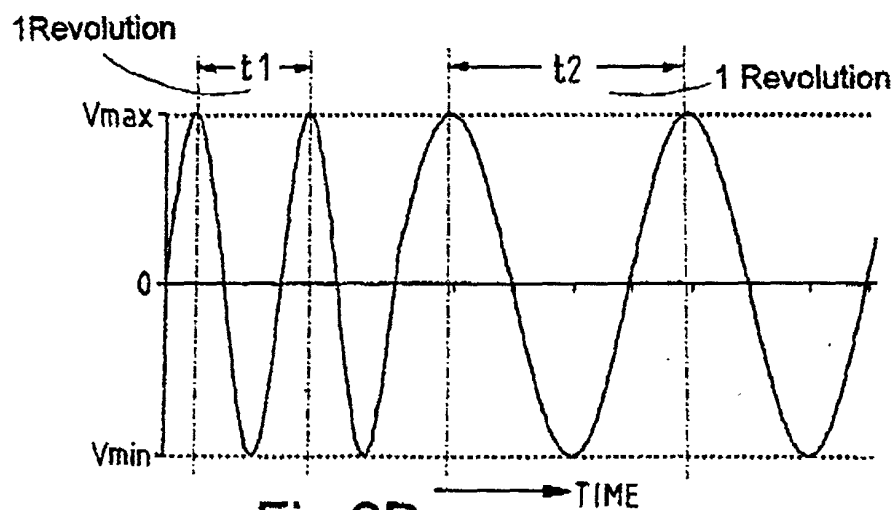


Fig. 2B

SUBSTITUTE SHEET (RULE 26)

10/009700

WO 00/65198

PCT/GB00/01629

2/4

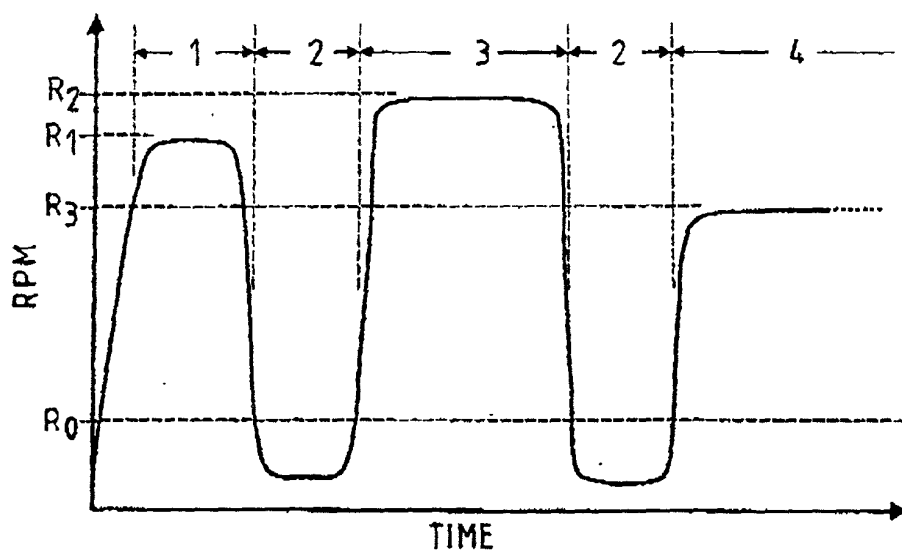


Fig.3A

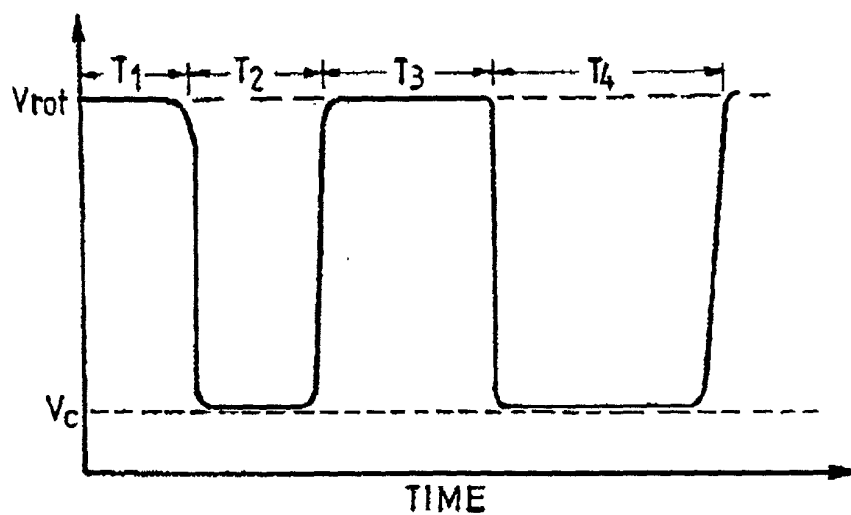


Fig.3B

3/4

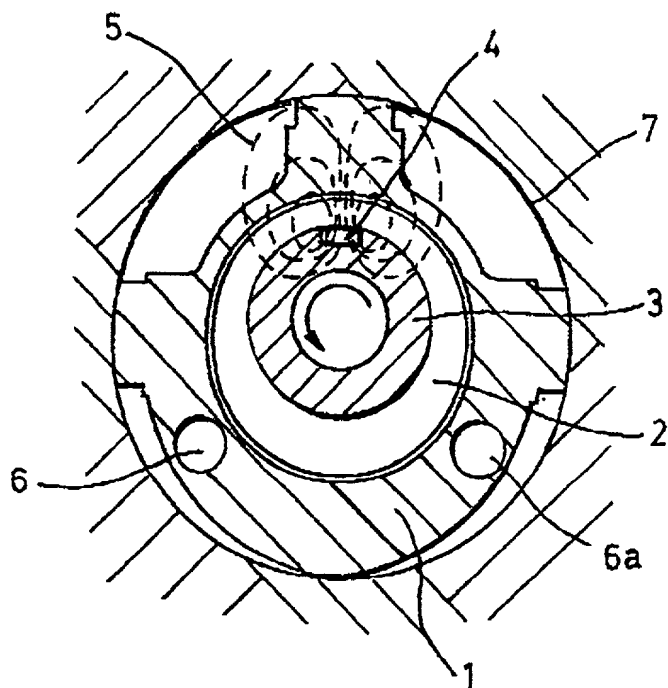


Fig.4A

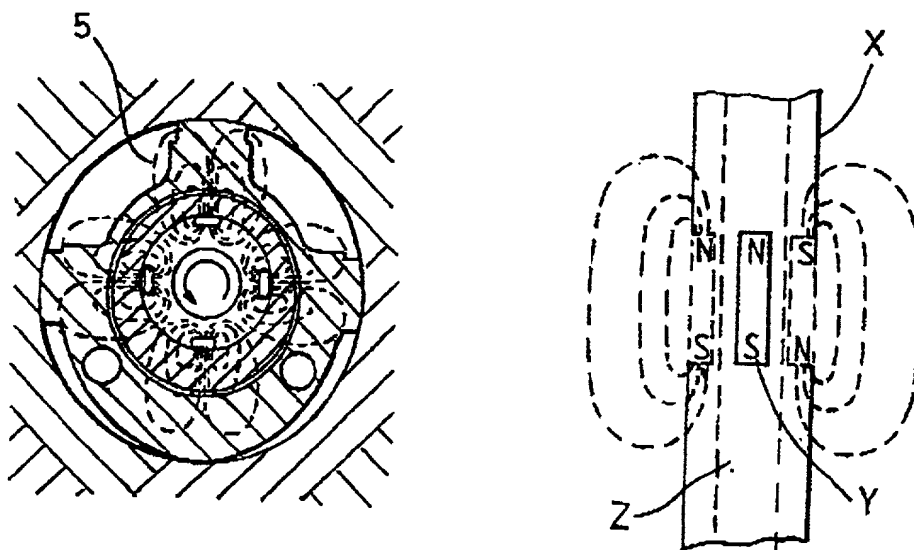


Fig.4B

WO 00/65198

10/009700

PCT/GB00/01629

4/4

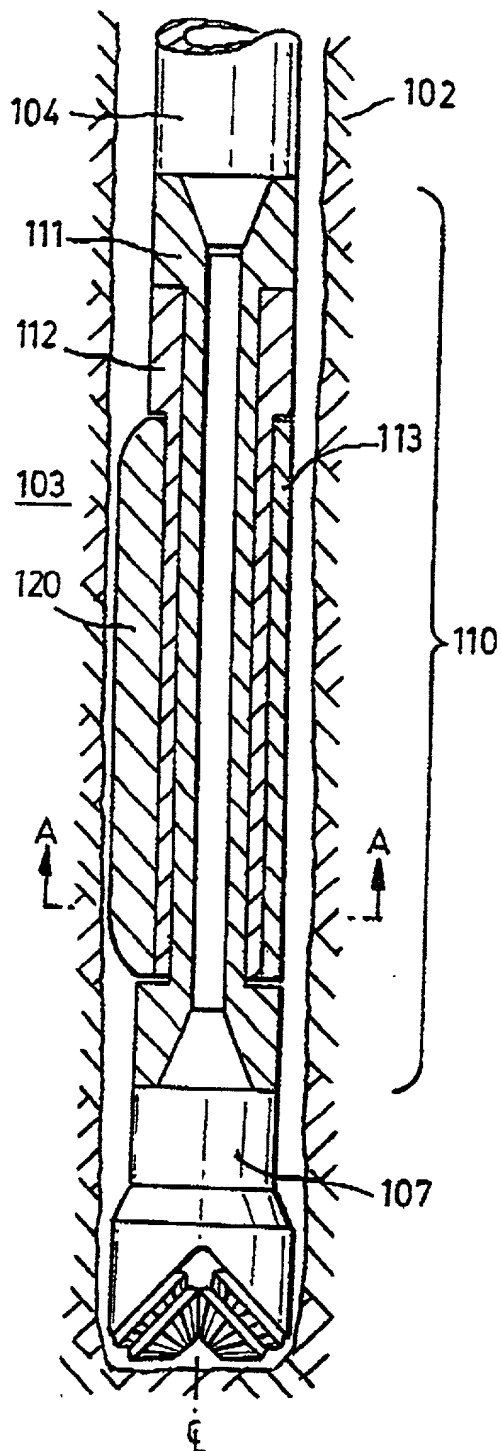


Fig.5A

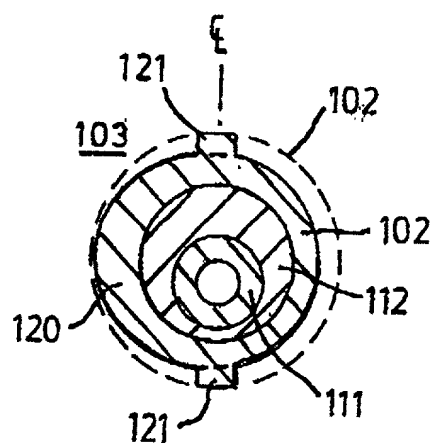


Fig.5B

SUBSTITUTE SHEET (RULE 26)

OCT-25-01 THU 1:17 PM C.W. Alworth-USA

FAX NO. 1 903 581 1441

P. 1

Please type a plus sign (+) inside this box → ☒

PTO/SB/01 (10-00)  
Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b> (37 CFR 1.63)	Attorney Docket Number	01 USN 152
	First Named Inventor	McLOUGHLIN, S.J.
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	25 OCT 2001
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Apparatus and Method for Transmitting Information to and Communicating with a Downhole Tool  
(Title of the Invention)

the specification of which

☒ is attached hereto  
OR  
☒ was filed on (MM/DD/YYYY) APR 27 2000 as United States Application Number or PCT International Application Number US 09/880,413 and was amended on (MM/DD/YYYY)                      (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
9926545.6	UK	Nov 9, 1999	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
60/131208 NA	April 27, 1999 NA	<input type="checkbox"/>

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

*Antoine*  
25 OCT 2001, 33824

OCT-25-01 THU 1:18 PM C.W. Alworth-USA

FAX NO. 1 903 581 1441

P. 3

Please type a plus sign (+) inside this box → 

PTO/36/01 (10-00)

Approved for use through 10/31/2002. OMB 0551-0036

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### POWER OF ATTORNEY OR AUTHORIZATION OF AGENT

Application Number	Applied Herewith
Filing Date	Applied Herewith
First Named Inventor	McLOUGHLIN, S.J.
Group Art Unit	
Examiner Name	
Attorney Docket Number	01 USN 152

I hereby appoint:

☒ Practitioners at Customer Number 27645  
OR

☐ Practitioner(s) named below:

Name



27645

PATENT TRADEMARK OFFICE

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.

Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/5B/96).

SIGNATURE of Applicant or Assignee of Record

Name

STEPHEN JOHN McLOUGHLIN

Signature

Date

25 OCT 2001

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ Total of one form is submitted herewith.

Burden Hour Statement: This form is estimated to take 2 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

*Handwritten:* 25 Oct 2001, 33824

OCT-25-01 THU 1:18 PM C.W. Alworth-USA

FAX NO. 1 903 581 1441

P. 2

Please type a plus sign (+) inside this box → ☒



PTO/SB/M1 (10-00)

Approved for use through 10/31/2002. OMB 0551-0032

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION — Utility or Design Patent Application**

Direct all correspondence to: <input checked="" type="checkbox"/> Customer Number or Bar Code Label				<input type="checkbox"/>	
Name <b>Charles W. Alworth</b>					
Address <b>Alworth Law and Engineering</b>					
Address <b>505 (Formerly 502) Cumberland Road</b>					
City <b>TYLER</b>		State <b>TEXAS</b>		ZIP <b>75703-9325</b>	
Country <b>USA</b>		Telephone <b>1-903-534-0477</b>		Fax <b>1-903-581-1441</b>	
<small>I hereby declare that I qualify as a Small Entity under the Law. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</small>					
NAME OF SOLE OR FIRST INVENTOR :				<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any)) <b>STEPHEN JOHN</b>		Family Name or Surname <b>McLOUGHLIN</b>			
Inventor's Signature 		Date <b>25 OCT 2001</b>			
Residence: City <b>NORTH DUFFIELD</b>		State <b>YORK</b>		Country <b>UK</b>	
Mailing Address <b>THE HOMESTEAD</b>					
Mailing Address					
City <b>NORTH DUFFIELD</b>		State <b>NR. SELBY</b>		Country <b>UK</b>	
NAME OF SECOND INVENTOR:				<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname			
Inventor's Signature		Date			
Residence: City		State		Country	
Mailing Address					
Mailing Address					
City		State		Country	
<input type="checkbox"/> Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.					

*Antony*  
25 OCT 2001 33824